


Product Image



Product Dimensions

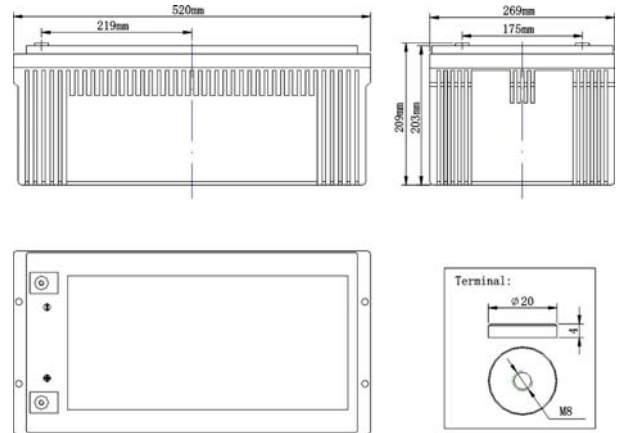

Characteristics

Nominal Voltage		12V
Watts/cell@15min		800W
Capacity 25°C (77°F)	10 hour rate (23.0A)	230Ah
	5 hour rate (42A)	210Ah
	1 hour rate (154.4A)	154.4Ah
Internal Resistance	Full Charged Battery 25°C	$\leq 3.3m \Omega$
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 46.0A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 46.0A Voltage 14.4-14.9V

Packaging

Battery Dimensions	Length	520mm
	Width	269mm
	Height	204mm
	Total Height	209mm
Box Dimensions	Length	537mm
	Width	284mm
	Height	279mm
Quantity Per Box		1 PC per box
Net weight Per Cell		70 kg \pm 3%
Net weight Per Box		70kg
Gross Weight		70.8kg

Discharge Constant Power per Cell (Watts at 77°F 25°C)







F.V/Time	10min	15min	20min	25min	30min	45min	60min	90min	2h	3h	10h
1.60V	1028.5	816.2	668.1	566.3	495.5	415.0	287.9	240.7	182.3	131.9	47.2
1.67V	1009.8	800.0	659.7	555.7	486.2	407.5	282.6	236.5	179.1	129.8	46.1
1.70V	991.2	786.9	647.6	545.6	477.4	400.0	277.2	231.5	175.3	127.1	45.6
1.75V	972.5	771.9	627.1	535.5	468.5	392.5	272.4	227.3	172.1	124.9	44.5
1.80V	935.1	742.1	600.5	514.7	450.4	377.5	261.7	218.8	165.7	120.1	42.9

Discharge Constant Current per Cell (Amperes at 77°F 25°C)

F.V/Time	10min	15min	20min	25min	30min	45min	60min	90min	2h	3h	10h
1.60V	551.5	437.7	358.2	303.7	265.7	222.5	154.4	129.1	97.8	70.7	25.3
1.67V	541.5	429.7	353.8	298.0	260.7	218.5	151.5	126.8	96.0	69.6	24.7
1.70V	531.5	421.9	347.2	292.5	256.0	214.5	148.6	124.1	94.0	68.1	24.4
1.75V	521.4	413.9	336.2	287.1	251.2	210.5	146.1	121.9	92.3	67.0	23.9
1.80V	501.4	397.9	322.0	276.0	241.5	202.4	140.3	117.3	88.8	64.4	23.0

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **MCA** for the latest information.

Performance Characteristics

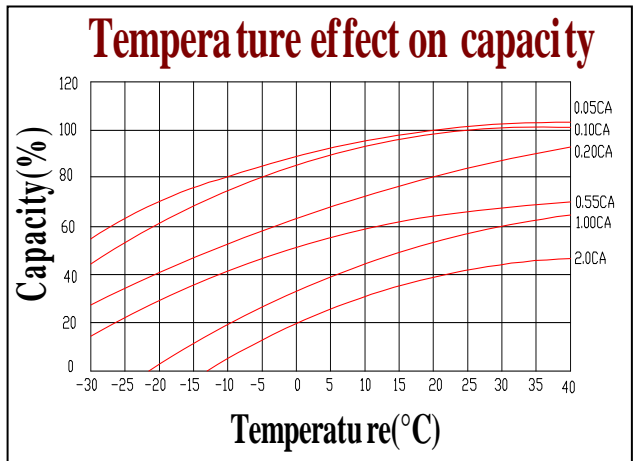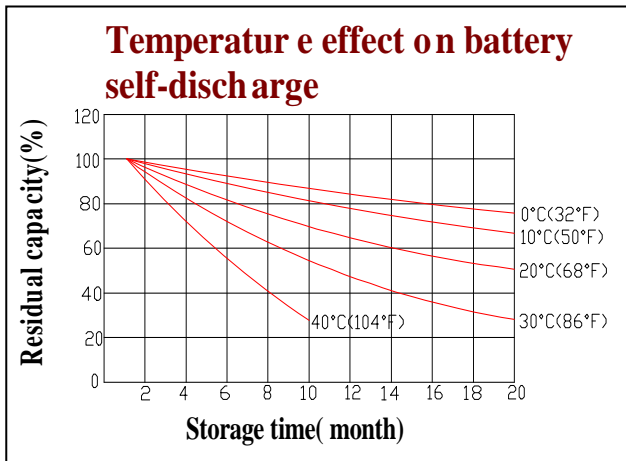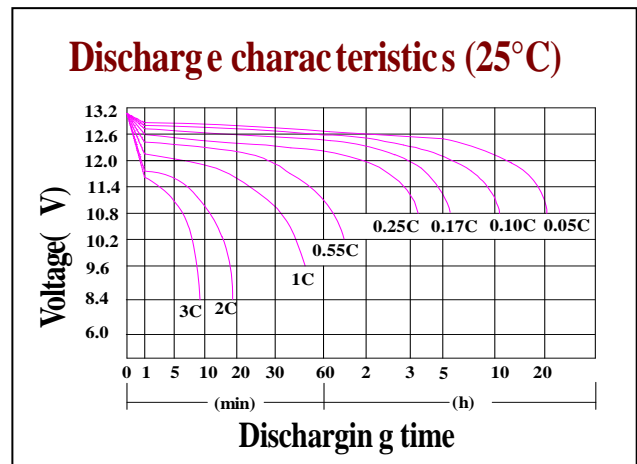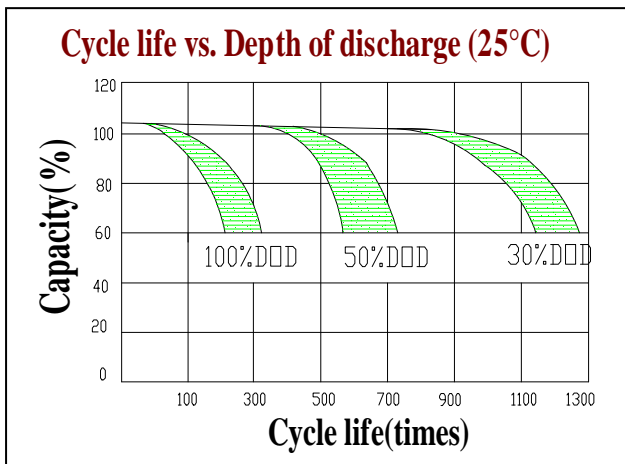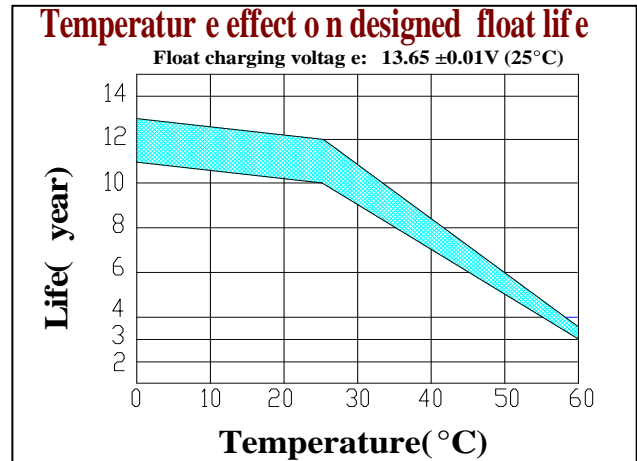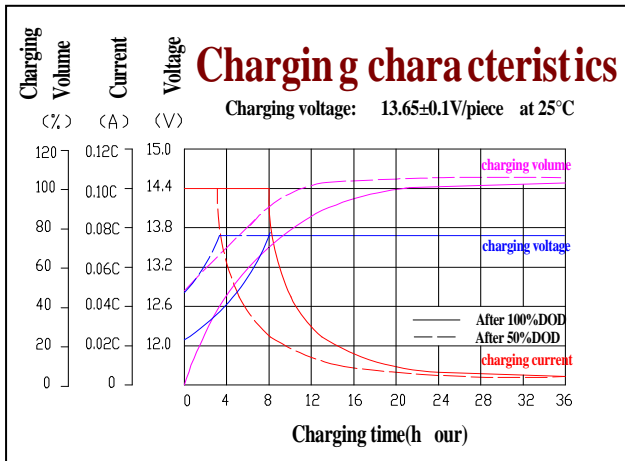

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid