


Product Image



Product Dimensions

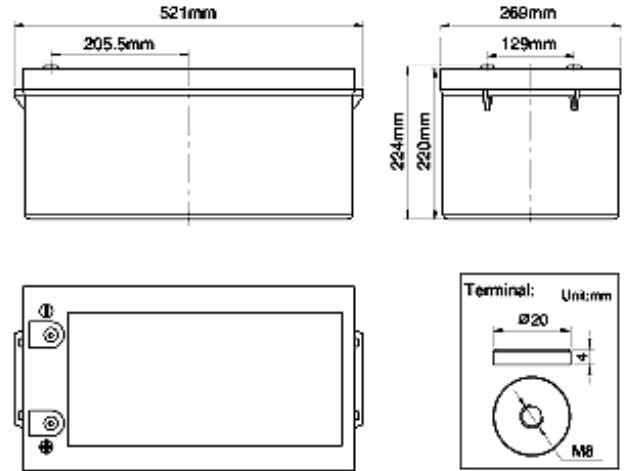

Characteristics

Nominal Voltage		12V
Watts/cell@15min		900W
Capacity 25°C (77°F)	10 hour rate (25.5A)	255Ah
	5 hour rate (44A)	220Ah
	1 hour rate (160A)	160Ah
Internal Resistance	Full Charged Battery 25°C	≤3.0m Ω
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 51.0A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 51.0A Voltage 14.4-14.9V

Packaging

Battery Dimensions	Length	520mm
	Width	268mm
	Height	220mm
	Total Height	226mm
Box Dimensions	Length	537mm
	Width	284mm
	Height	299mm
Quantity Per Box		1 PC per box
Net weight Per Cell		79 kg±3%
Net weight Per Box		79kg
Gross Weight		79.8kg

Discharge Constant Power per Cell (Watts at 77°F 25°C)







F.V/Time	10min	15min	20min	25min	30min	45min	60min	90min	2h	3h	10h
1.60V	1140.3	920.7	740.7	627.9	549.4	460.1	319.2	266.9	202.1	146.2	52.3
1.67V	1119.6	900.0	731.5	616.1	539.1	451.8	313.3	262.2	198.6	143.9	51.1
1.70V	1098.9	887.5	718.0	604.9	529.3	443.5	307.3	256.7	194.4	140.9	50.5
1.75V	1078.2	870.7	695.3	593.7	519.5	435.2	302.0	252.0	190.8	138.5	49.3
1.80V	1036.8	837.0	665.8	570.7	499.4	418.5	290.1	242.5	183.7	133.2	47.6

Discharge Constant Current per Cell (Amperes at 77°F 25°C)

F.V/Time	10min	15min	20min	25min	30min	45min	60min	90min	2h	3h	10h
1.60V	611.4	493.6	397.2	336.7	294.6	246.7	171.2	143.1	108.4	78.4	28.1
1.67V	600.3	484.6	392.2	330.3	289.0	242.3	168.0	140.6	106.5	77.1	27.4
1.70V	589.2	475.9	385.0	324.3	283.8	237.8	164.8	137.6	104.2	75.5	27.1
1.75V	578.1	466.9	372.8	318.3	278.5	233.3	161.9	135.1	102.3	74.3	26.5
1.80V	555.9	448.8	357.0	306.0	267.8	224.4	155.6	130.1	98.5	71.4	25.5

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **MCA** for the latest information.

Performance Characteristics

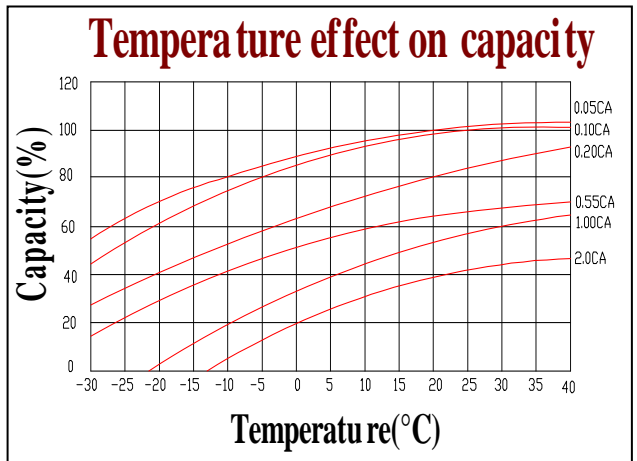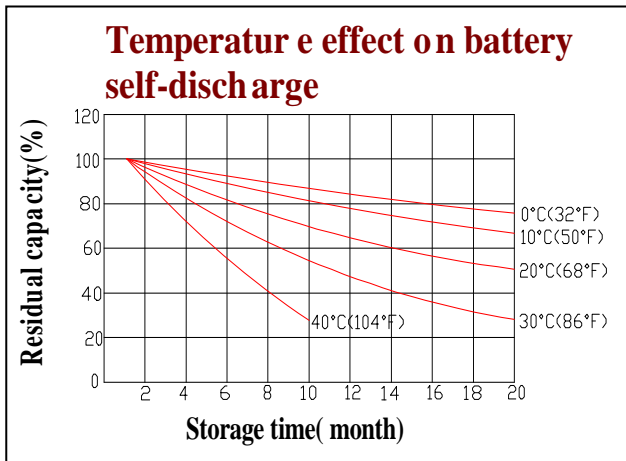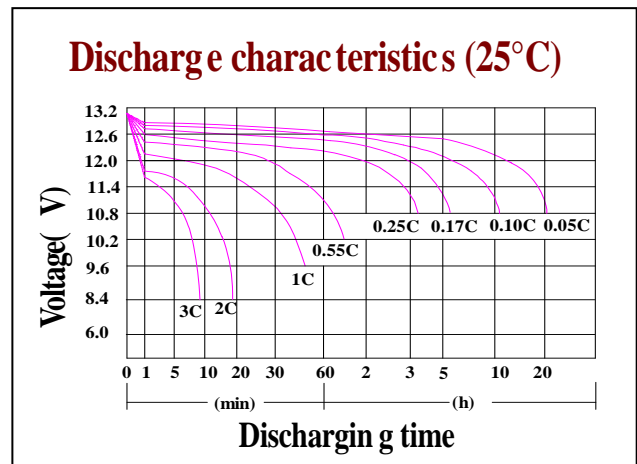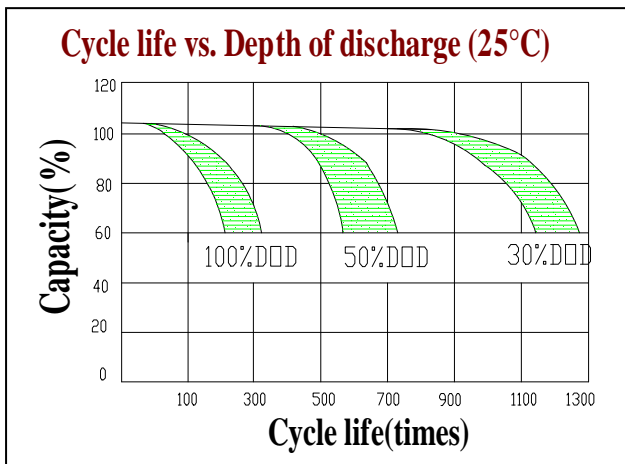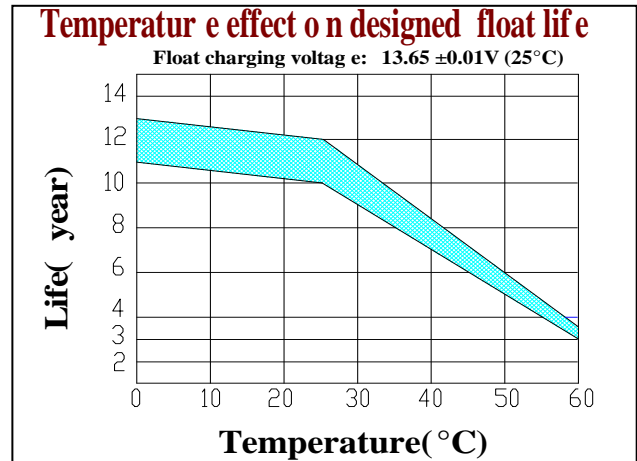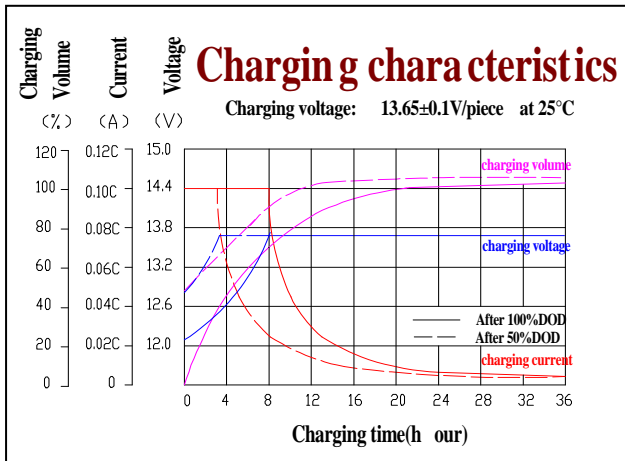

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid