


Product Image



Product Dimensions

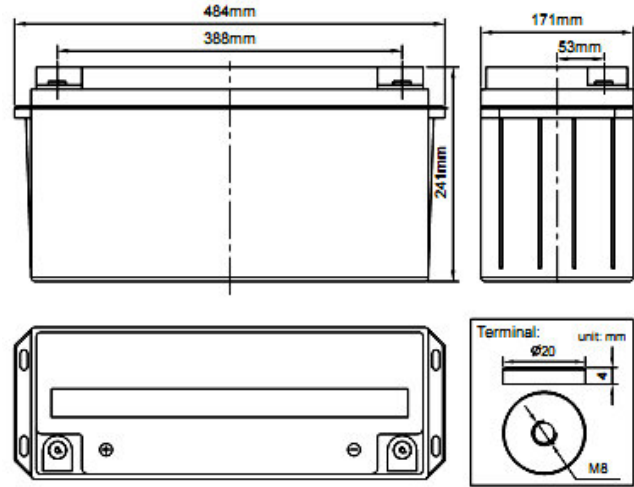

Characteristics

Nominal Voltage		12V
Nominal Capacity (10 hour rate)		150Ah
Capacity 25°C (77°F)	20 hour rate (8.03A)	160.6Ah
	5 hour rate (27.4A)	137Ah
	1 hour rate (80.3A)	80.3Ah
Internal Resistance	Full Charged Battery 25°C	≤3.5mΩ
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 30A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 30A Voltage 14.4-14.9V

Packaging

Battery Dimensions	Length	484mm
	Width	171mm
	Height	241mm
	Total Height	241mm
Box Dimensions	Length	499mm
	Width	185mm
	Height	299mm
Quantity Per Box		1 PC per box
Net weight Per Cell		43.5 kg±3%
Net weight Per Box		43.5kg
Gross Weight		44.0kg

Discharge Constant Current per Cell (Amperes at 77°F 25°C)







F.V/Time	20min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	163.0	142.8	102.5	87.4	60.8	44.5	28.6	17.5	15.6	8.27
1.65V	158.6	139.0	99.7	85.0	59.7	43.7	28.2	17.3	15.5	8.19
1.70V	154.2	135.2	97.0	82.7	58.6	42.8	27.8	17.1	15.3	8.11
1.75V	149.9	131.3	94.2	80.3	57.2	41.8	27.4	17.0	15.2	8.03
1.80V	145.5	127.5	91.5	78.0	55.8	40.8	27.0	16.8	15.0	7.95

Discharge Constant Power per Cell (Watts at 77°F 25°C)

F.V/Time	20min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	313.7	274.9	197.3	168.2	117.1	85.6	55.1	33.6	30.0	15.9
1.65V	305.3	267.5	192.0	163.7	114.9	84.0	54.3	33.3	29.7	15.8
1.70V	296.9	260.2	186.7	159.2	112.8	82.5	53.5	33.0	29.5	15.6
1.75V	288.5	252.8	181.4	154.7	110.1	80.5	52.8	32.7	29.2	15.5
1.80V	280.1	245.4	176.1	150.2	107.4	78.5	52.0	32.3	28.9	15.3

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **MCA** for the latest information.

Performance Characteristics

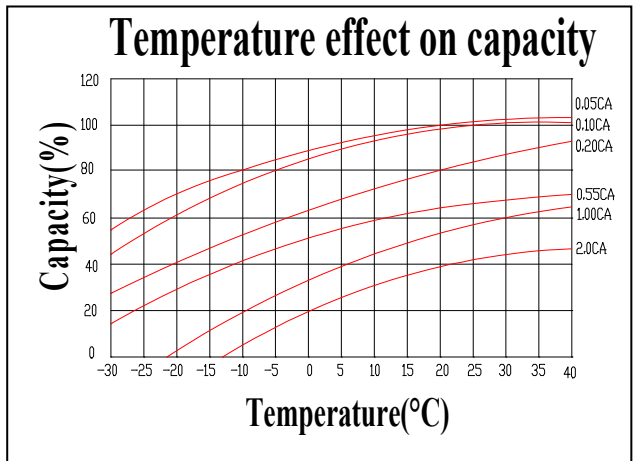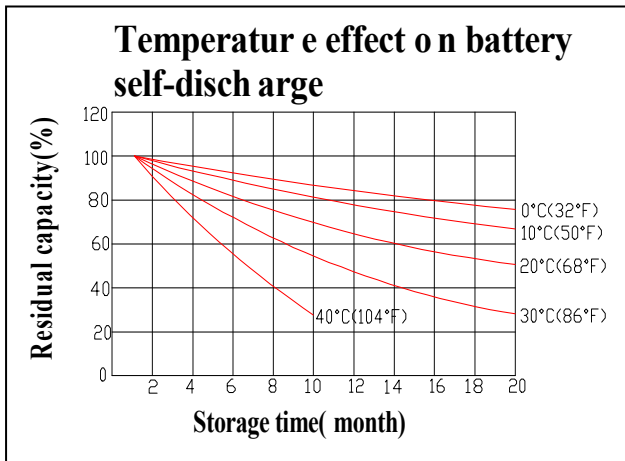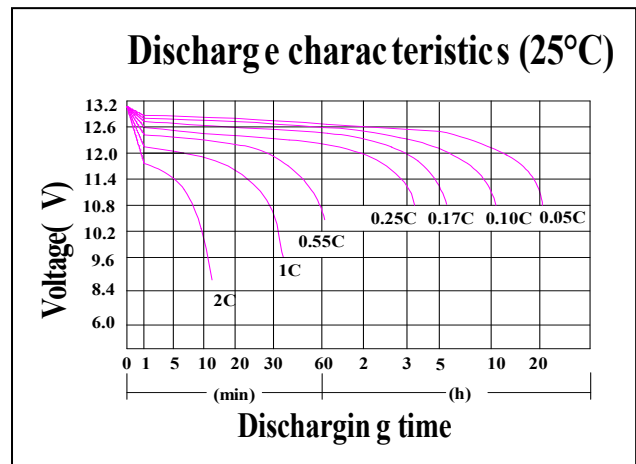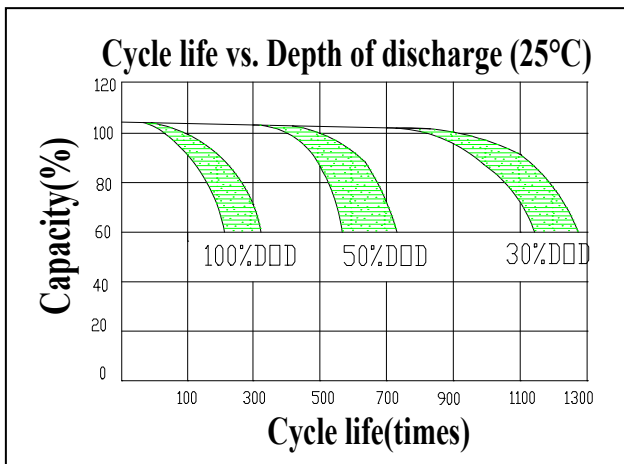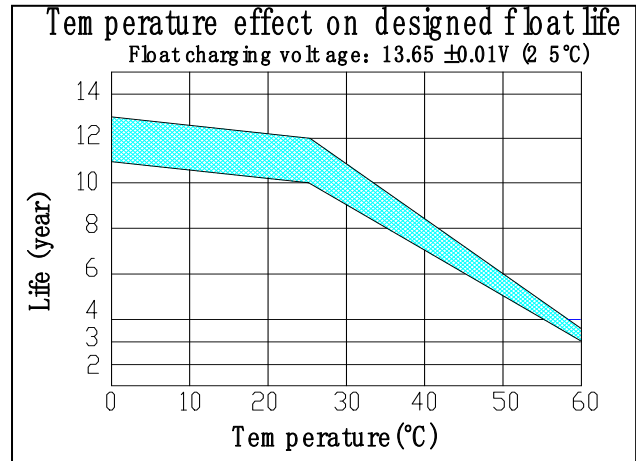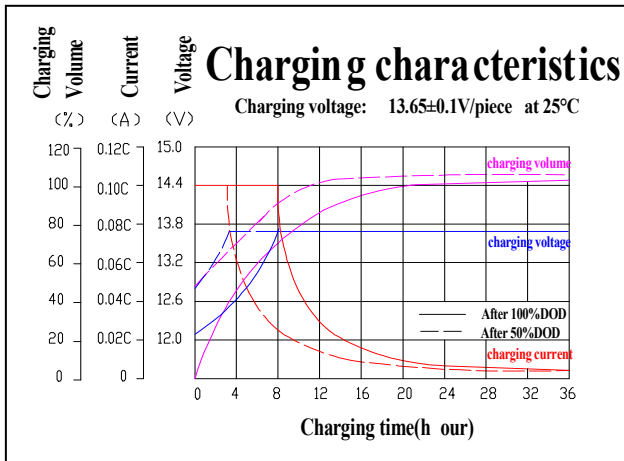

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid