


### Product Image



### Product Dimensions

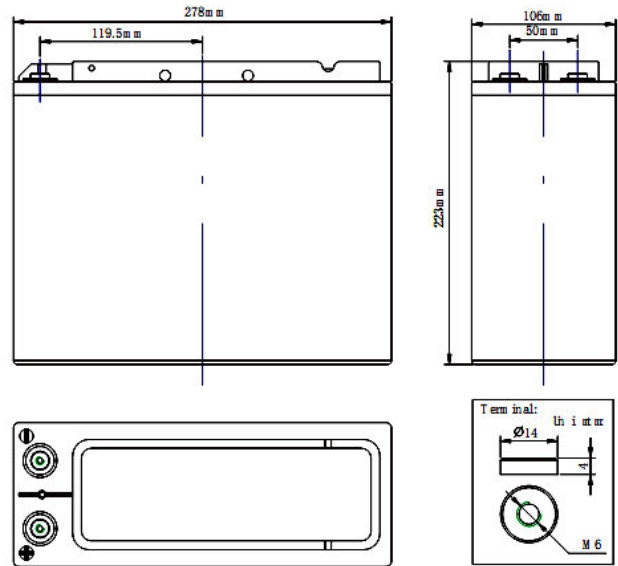

### Characteristics

Nominal Voltage		12V
Nominal Capacity (10 hour rate)		55Ah
Capacity 25°C (77°F)	20 hour rate (2.89A)	57.8Ah
	8 hour rate (6.6A)	52.8Ah
	5 hour rate (9.8A)	49.0Ah
	1 hour rate (33.1A)	33.1Ah
Internal Resistance	Full Charged Battery 25°C	≤8mΩ
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 11A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 11A Voltage 14.4-14.9V

### Packaging

Battery Dimensions	Length	277mm
	Width	106mm
	Height	223mm
Box Dimensions	Total Height	223mm
	Length	293mm
	Width	121mm
Quantity Per Box		1 PC per box
Net weight Per Cell		16 kg±3%
Net weight Per Box		16kg
Gross Weight		16.5kg

#### Discharge Constant Current (Amperes at 77°F/25°C)







F.V/Time	15min	30min	45min	1h	1.5h	2h	3h	5h	8h	10h	12h	20h	24h
10.5	102.1	52.4	37.5	33.1	27.3	21.1	14.9	9.8	6.7	5.6	4.73	2.90	2.45
10.8	97.9	51.2	36.6	32.3	26.7	20.6	14.6	9.6	6.6	5.5	4.68	2.89	2.43
11.1	90.8	47.8	34.2	31.5	26.0	20.0	14.1	9.3	6.3	5.26	4.50	2.77	2.32
11.4	75.4	40.3	28.9	28.0	23.1	17.8	12.5	8.2	5.6	4.69	3.99	2.45	2.05

#### Discharge Constant Power (Watts at 77°F 25°C)

F.V/Time	15min	30min	45min	1h	1.5h	2h	3h	5h	8h	10h	12h	20h	24h
10.5	1163.7	613.1	441.3	413.5	339.5	259.4	183.1	120.5	81.9	68.4	58.2	35.7	30.1
10.8	1116.1	598.5	430.8	397.8	328.8	253.7	179.3	118.4	81.2	67.7	57.5	35.5	29.9
11.1	1051.0	568.0	404.6	388.8	327.1	249.6	175.5	115.9	78.8	65.6	56.1	34.6	28.9
11.4	882.7	479.0	342.8	349.5	291.4	221.5	155.5	102.4	69.7	58.3	49.5	30.4	25.4

**Note** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **MCA** for the latest information.

## Performance Characteristics

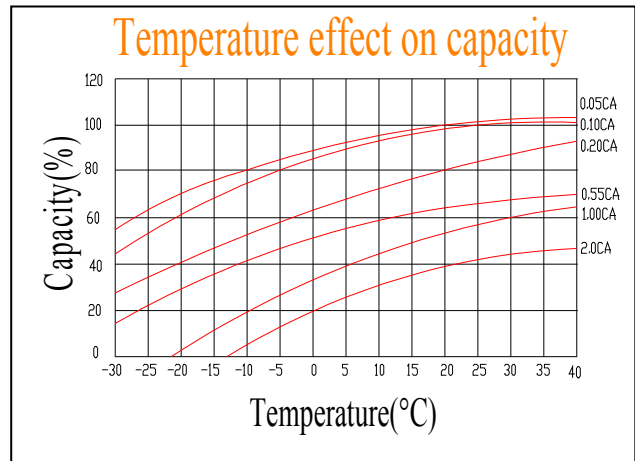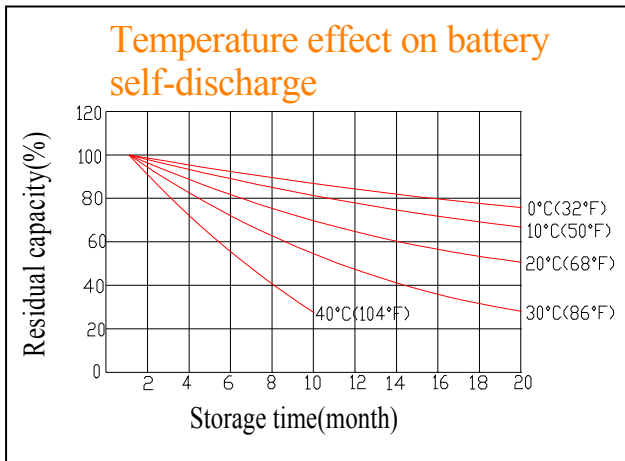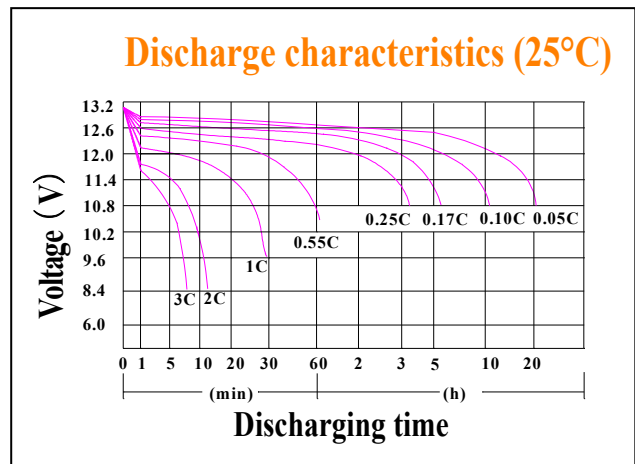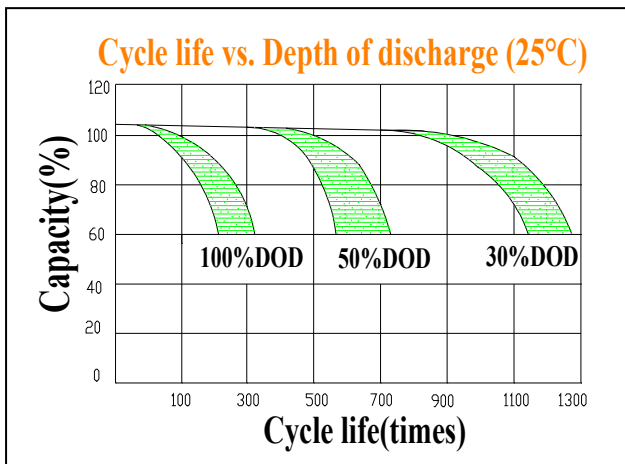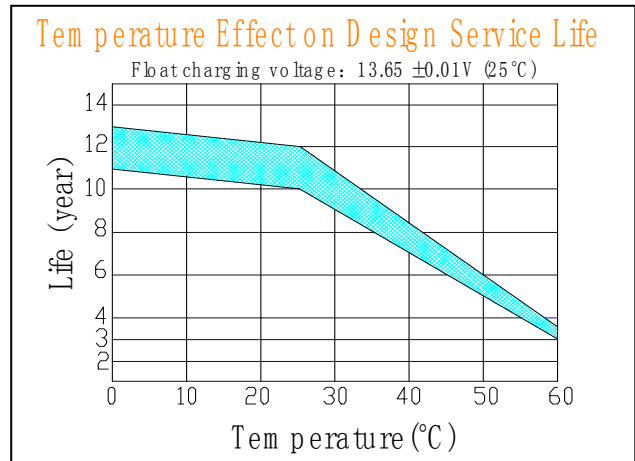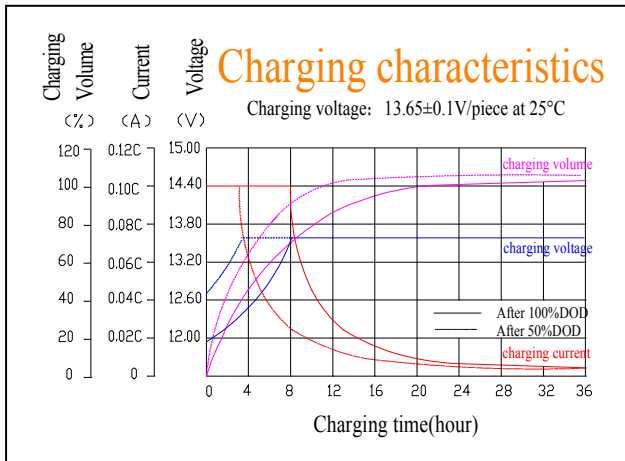

## Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid